



# Intelligent Type Peristaltic Pump



**Model No. : LabV6-III**

**Flow Rate : 0.0053-3100mL/min**



Single Channel



Dual Channel

## Product Features

Industrial grade 4.3" true color LCD screen, touch screen control.


Mechanical keypad control pump start, stop, full speed and direction.

Dynamic display transferring status. Flow rate data, setting parameters and system configuration display in the same screen.

3 Kinds of working mode: fixed volume metering, fixed time and volume, timer start and stop, meet different transferring and dispensing request.

Intelligent calibration function and online micro adjusting function.

## Screen Display

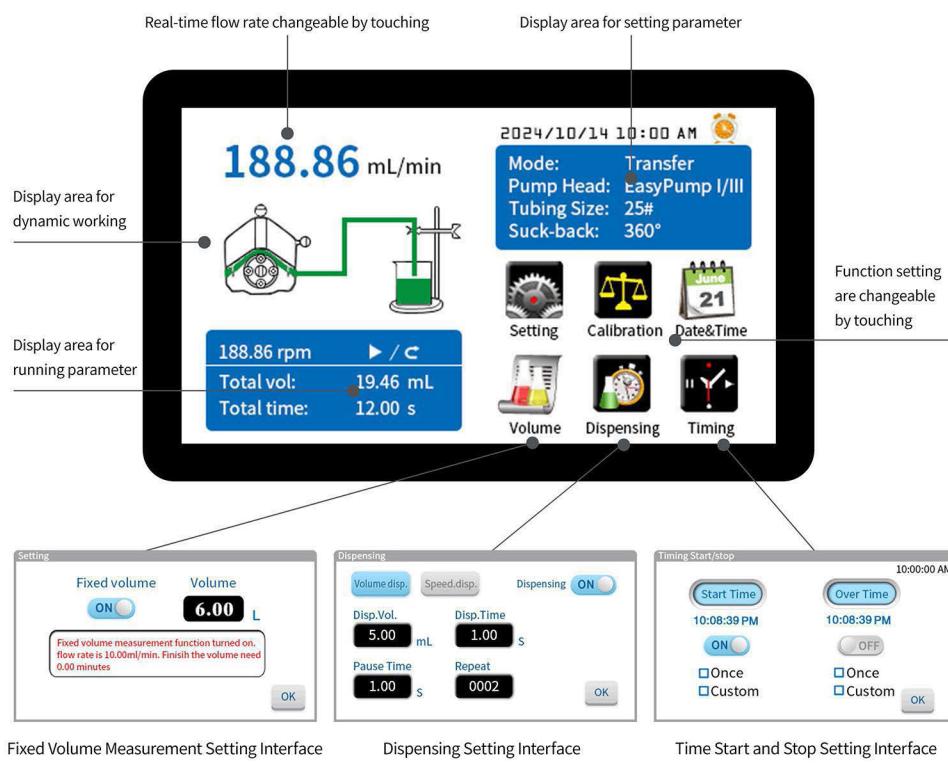



## Pump Head

EasyPump Series  
(Pressure Adjustable)EasyPump Series  
(Fixed Pressure)EasyPump Series  
(Pressure Adjustable)EasyPump Series  
(Fixed Pressure)

## Pump Head & Flow Rate

Pump Head	Tubing	ID×Wall thickness(mm)	mL / r	Flow Rate(mL/min) (LabV6-III,0.1-600rpm)	Tubing Max.Pressure(Mpa)		Weight(kg)	
					Intermittent	Continuous		
Single Channel EasyPump I/III	13#	0.8×1.6	0.053	0.0053~32	0.27	0.17	0.6	
	14#	1.6×1.6	0.27	0.027~162				
	19#	2.4×1.6	0.55	0.055~330				
	16#	3.1×1.6	0.933	0.093~560				
	25#	4.8×1.6	1.967	0.197~1180	0.24	0.14		
	17#	6.4×1.6	3.333	0.333~2000	0.14	0.10		
	18#	7.9×1.6	4.3	0.430~2580	0.10	0.07		
Single Channel EasyPump II/IV	15#	4.8×2.4	1.8	0.180~1080	0.27	0.17		
	24#	6.4×2.4	2.733	0.273~1640				
	35#	7.9×2.4	3.833	0.383~2300	0.24	0.14		
	36#	9.6×2.4	5.167	0.517~3100				
Dual Channel EasyPump V/VI	13#	0.8×1.6	0.0053	0.0053~32	0.27	0.17	0.6	
	14#	1.6×1.6	0.27	0.027~162				
	19#	2.4×1.6	0.55	0.055~330				
	16#	3.1×1.6	0.933	0.093~560				
	25#	4.8×1.6	1.967	0.197~1180	0.24	0.14		



Drive	Pump Head	Tubing	Filling Volume (mL)	Filling Time(s)	Filling Accuracy ( $\pm\%$ )	Output(pcs/min)	Motor Speed(rpm)
LabV6-III	EasyPump	13#	0.4	1.2	0.8	27	377.36
		13#	1	2.5	0.5	17	452.83
		14#	2	1	0.5	30	444.44
		19#	5	1.2	0.5	27	454.55
		16#	7	1	0.5	30	450.16
		25#	10	0.8	0.8	33	381.29
		25#	15	1	0.5	30	457.55
		25#	20	1.5	0.5	24	406.71
		17#	30	1.2	0.5	27	450.05
		18#	50	1.5	0.5	24	465.12
		15#	15	1.2	0.5	27	416.67
		24#	20	1.2	0.5	27	365.90
		35#	30	1.2	0.5	27	391.34
		36#	50	1.5	0.5	24	387.07
	2*EasyPump	13#	0.5	0.8	0.8	33	353.77
		13#	1	1.2	0.5	27	471.70
		14#	2	0.6	1	38	370.37
		14#	5	1.5	0.5	24	370.37
		19#	10	1.2	0.5	27	454.55
		16#	15	1.2	0.5	27	401.93
		16#	20	1.5	0.5	24	428.72
		25#	30	1	0.5	30	457.55
		17#	50	1	0.5	30	450.05
		18#	70	1	0.5	30	488.37
		15#	30	1.2	0.5	27	416.67
		24#	50	1.2	0.5	27	457.37
		35#	70	1.2	0.5	27	456.56
		36#	100	1.5	0.5	24	387.07




## Technical Specifications

Flow rate range	0.0053-3100mL/min
Flow rate resolution	0.01mL/min
Speed range	0.1~600rpm
Speed resolution	0.01rpm
Dispensing volume	0.01~9999mL
Volume resolution	0.01mL
Dispensing time	0.1~9999s
Pause time	0.1~9999s
Time resolution	0.01s
Repeat number	1-9999 times, setting "0" as infinite / continuous dispensing
Flow rate accuracy	<±0.5%
Back suction angle	0-360°
Motor type	Stepper motor
Display	4.3 inch-industrial grade-True color LCD screen
Control method	Touch screen and Mechanical keypad
Keypad lifetime	300,000 times
External control signal	0-5V,0-10V,4-20mA for option
Start/stop,change direction signa	Passive switch signal,such as:foot pedal switch,Active switch signal:5V-24V
Communication interface	RS232,RS485 support MODBUS protocol(RTU mode)
Output interface	Output motor working status(Open-Collector output)
Power supply	220V +10%50Hz/60Hz (standard),110V +10%50Hz/60Hz (optional)
Drive dimension (LxWxH)	259×157×237(L×W×H)
Drive Weight	4.40kg
Power consumption	<80W
condition temperature	0-40°C
Relative humidity	<80%



Dimension Drawing (Unit:mm)

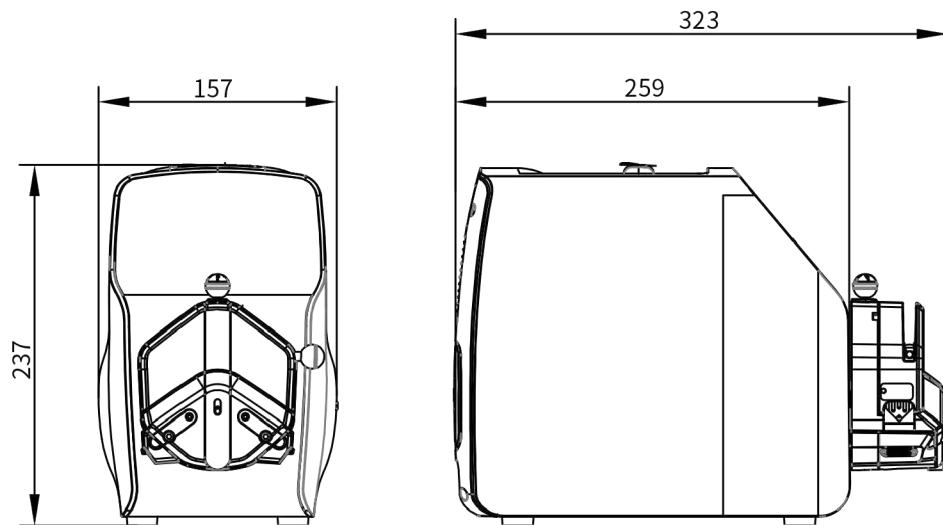

VOTRE REVENDEUR :

**clouup**  
42 à 48 bd de Polangis - BP 260  
94502 Champigny-sur-Marne - Cedex  
 01 48 83 21 76 -  01 48 83 51 01  
[info@clouup.fr](mailto:info@clouup.fr) [www.clouup.fr](http://www.clouup.fr)